

# Galintel®

## STEEL LINTELS

Product Guide



The Galintel® brand  
is proudly owned by



**NEPEAN**  
Building &  
Infrastructure

# Contents

|                              | Page No.  |
|------------------------------|-----------|
| <b>01 Introduction</b>       | <b>03</b> |
| <b>02 Products</b>           | <b>05</b> |
| Solid Base Angle             | 06        |
| Rendabar®                    | 07        |
| Multi-Rib T-Bar              | 08        |
| Traditional T-Bar            | 09        |
| J-Bar                        | 10        |
| Cavi-T-Bar™                  | 11        |
| Traditional Angle            | 12        |
| Traditional Flat Bar         | 12        |
| Frequently asked questions   | 13        |
| <b>03 Stock Length Guide</b> | <b>14</b> |

NEPEAN Building & Infrastructure is a division of NEPEAN, Australia's largest privately owned engineering and industrial manufacturing organisation.


The renowned Galintel® brand, designed and manufactured by NEPEAN Building & Infrastructure, represents Australia's highest quality galvanised steel lintels for the building industry.

This specialised range of lintels includes the proprietary Multi-Rib® T-bar, Rendabar®, J-Bar shelf beam and Cavi-T-Bar, all designed for optimum support of brickwork above clear openings. The innovative design of Galintel® products enables weight savings of up to 40% while maintaining structural rigidity and enhanced load bearing capacity. Galintel® also manufactures Solid Base Angle and a range of traditional flat, angle and T-Bars making it the most comprehensive brand of lintels in the Australian market.

Galintel® products are hot-dip galvanised to Australian Standards which ensures that all surfaces are fully protected.

Being locally manufactured, Galintel® offers the best delivery performance in the industry. With a comprehensive range of stock held across a number of warehouses, next day dispatch is guaranteed for all stock orders.

Galintel® products have been tested by CSIRO Building Products & Systems and comply with the requirements of the Building Code of Australia. Engineering certification for structural adequacy has been verified by independent testing at the University of NSW and Sydney University and Galintel® products are approved by housing authorities and local government bodies in all states.

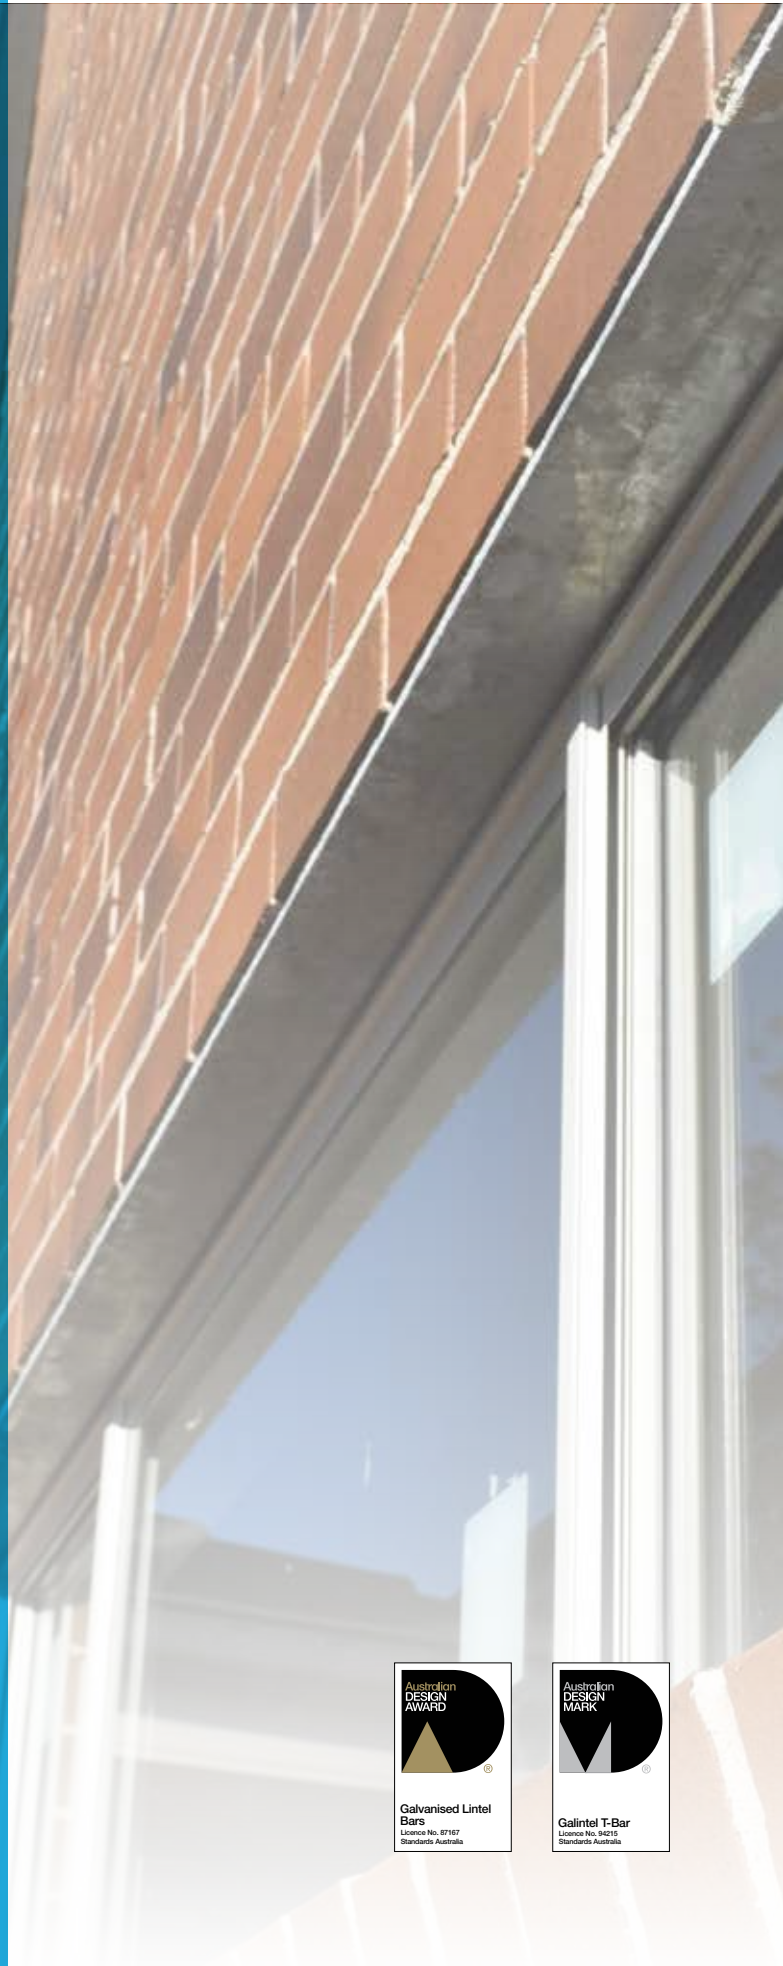

# Galintel®

## THE TRUSTED NAME IN GENUINE HOT-DIP GALVANISED STEEL LINTELS

Galintel® from NEPEAN Building & Infrastructure is Australia's leading designer and manufacturer of high quality steel lintels for the building industry. Use the simple guides in this brochure and select the right Galintel® every time for peace of mind, superior performance, long life and durability.

Genuine Galintel® hot-dip galvanised steel lintels are up to 40% lighter than traditional lintels and 40% easier to carry with a high strength to weight ratio.

### Better for builders – better for homeowners

The ribbed Galintel® profile creates a superior bond with mortar. The brickwork, mortar and lintel work together to form a composite beam with exceptional strength and load carrying capacity.

Galintel® steel lintels are for both residential and commercial buildings. Builders and homeowners do not have to worry about corroded lintels and cracked brickwork thanks to the generous galvanising layer – including the ends of the product where corrosion often begins.

### Durability & corrosion resistance (R3 rating)

All Galintel® products are hot-dip galvanised with a heavy zinc coating of 600g/m<sup>2</sup> which complies with a R3 durability rating. Durability is a function of the thickness of the zinc coating. Black steel is classified as R0 and stainless steel is R4. Galintel® products can achieve an R4 durability rating when coated with a two-part epoxy protective coating (contact NEPEAN Building & Infrastructure for specifications).

### Industry compliance

All Galintel® products comply with the following standards:

- > Hot-dip galvanised to AS/NZS4680
- > R3 durability ratings in accordance with AS/NZS2699.3
- > Loads in accordance with AS/NZS1170.1
- > Masonry in Small Buildings in accordance with AS/NZS4773.1 Design & AS/NZS4773.2 Construction
- > Masonry Structures in accordance with AS3700
- > Steel Structures in accordance with AS4100

Compliance with the Building Code of Australia & relevant standards is guaranteed – Galintel® products have CSIRO approval and are backed by research conducted by the University of NSW and Sydney University.

### Product warranty

All Galintel® products are guaranteed against defects in materials and workmanship.

NEPEAN Building & Infrastructure further warrants that Galintel® products will suffer no loss of function nor adversely affect masonry for 25 years from the date of installation. For full warranty conditions and registration details please visit [www.galintel.com.au](http://www.galintel.com.au)

# DON'T SETTLE FOR SUBSTITUTES. LOOK FOR THE GENUINE GALINTEL® BRAND.

For load tables and section properties for all Galintel® products, please refer to [www.galintel.com.au](http://www.galintel.com.au)


## HOT-DIP GALVANISED STEEL LINTEL FEATURES

Galintel® products are hot-dip galvanised to Australian standards to ensure that all surfaces are fully protected.

### SOLID BASE ANGLE

Heavy galvanised coating  
(600g/m<sup>2</sup>) R3 Rating

Sharp internal angle  
with no need to mitre  
back edge of brickwork

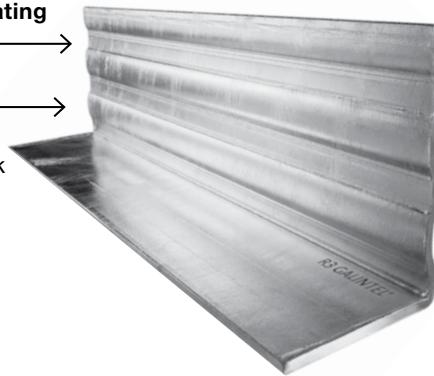


Ribbed profile

Wide base support  
with smooth soffit

### MULTI-RIB® T-BAR

Heavy galvanised coating  
(600g/m<sup>2</sup>) R3 Rating

Sharp internal angle  
with no need to mitre  
back edge of brickwork

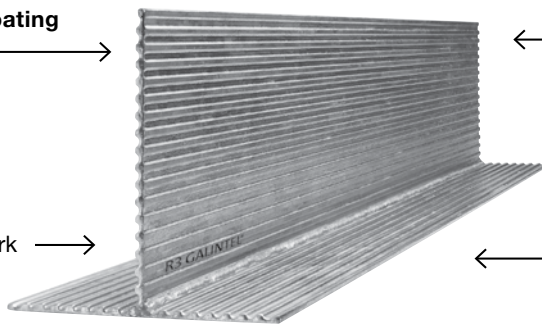

Multi-rib profile

Wide base support  
with smooth soffit

- R3 durability rating
- 25 year Warranty



# PRODUCTS



## SOLID BASE ANGLES

**Galintel® Solid Base** angles have been designed to support brickwork over windows & doors with the brickwork, mortar and lintel work together to form a composite beam with exceptional strength and load-carrying capacity. Genuine Galintel® hot dip galvanized Solid Base Angles are 40% lighter than solid lintels (and 40% easier to carry) with a high strength to weight ratio.



**Sizes:**

- 100 x 100 x 6mm
- 150 x 100 x 6mm

**Weight guide: [Nominal]**

- 8.5kg/m
- 11kg/m

**Lengths:**

- 900mm to 2700mm
- 1800mm to 4000mm

### Features

- > The unique profile provides a recess for mortar bedding on the vertical leg. The bonding of mortar, brickwork and lintel forms a composite beam of superior strength and load bearing capacity
- > Hot-dip galvanised to AS/NZS4680
- > 40% lighter than conventional steel lintels with a high strength to weight ratio
- > R3 Durability Rating to AS/NZS2699.3
- > Fully engineered and tested
- > Compliant with relevant Australian Building Codes and Australian Standards
- > Labelled and barcoded
- > 25 year performance warranty
- > Australian designed and manufactured

### Benefits

- > Superior performance
- > Easy transportation, storage and handling
- > Long life and durability
- > Peace of mind
- > Cost effective
- > Easy identification

### Control Joints


Where control joints are used as a required structural element, loading of the lintel should be reduced by one third.

### Propping

For best results all lintels must be propped before bricklaying. Props must be no further than 1.2m apart and must remain in place until the mortar has fully cured.

### Composite Action

Galintel® products rely on composite action. Therefore, to achieve ultimate performance, mortar must be present at all contact surfaces between bricks and lintel.

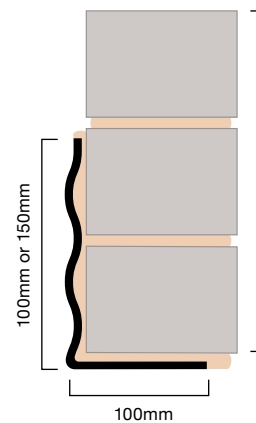

Brick composite beam.  
Minimum 3 courses of bricks.  
**Note:** Mortar must be present at all contact surfaces between bricks and lintel.

## RENDABAR®

**Galintel Rendabar®** is a total load bearing bar, fire-rated and specifically designed to facilitate cement rendering. The bond between mortar, brickwork and lintel forms a composite beam of superior strength and structural integrity. The platform leg provides a wide base of support for brickwork and a generous keying area for cement rendering.



### Sizes:

100 x 100 x 8mm  
150 x 100 x 8mm

### Weight guide: [Nominal]

9kg/m  
11kg/m

### Lengths:

900mm to 2400mm  
1800mm to 4000mm

### Features

- > Fire-rated lintel
- > Hot-dip galvanised to AS/NZS4680
- > 40% lighter than conventional steel lintels with a high strength to weight ratio
- > The bond between mortar, brickwork & lintel forms a composite beam of superior strength & structural rigidity
- > Achieves R3 Durability Rating in accordance with AS/NZS2699.3
- > Fully engineered & university tested
- > Compliant with relevant Australian Building Codes and Australian Standards
- > Labelled and barcoded
- > 25 year performance warranty
- > Australian designed and manufactured

### Benefits

- > Superior performance
- > Easy transportation, storage and handling
- > Long life and durability
- > Cost effective
- > Easy identification
- > Peace of mind

### Light weight with rigidity

Galintel Rendabar® is considerably lighter than other forms of lintels, contributing to ease of handling and faster construction with less potential damage to green masonry. Mortar bonding with the multi-ribbed section locks the Rendabar® firmly to the masonry, providing superior lateral bracing and rigidity.

### Control joints

Where control joints are used as a required structural element, loading of the lintel must be reduced by one-third.

### Propping


Rendabar® spans must be propped at equal intervals (not more than 1.2m apart) when brickwork is laid up rapidly over and above two courses.

### Code compliance

Galintel Rendabar® has been extensively tested by Unisearch Limited, the research and development company of the University of New South Wales, for strength, structural adequacy and compliance with relevant Australian Building Codes and is ABSAC approved.

### Composite Action

Galintel® products rely on composite action. Therefore, to achieve ultimate performance, mortar must be present at all contact surfaces between bricks and lintel.

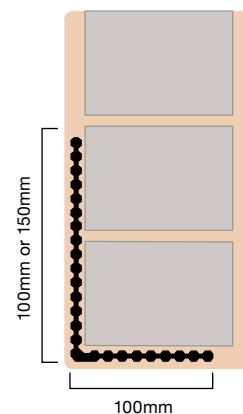

Brick composite beam.  
Minimum 3 courses of bricks.

**Note:** Mortar must be present at all contact surfaces between bricks and Rendabar.

## MULTI-RIB T-BAR

**Galintel® Multi-Rib T-Bar** is a cost effective lintel that provide structural rigidity, high strength-to-weight ratio and resistance to corrosion.

The multi-ribbed profile forms a superior bond with the mortar. This bond between mortar, brickwork and lintel creates a composite beam of superior strength and structural integrity.

The Galintel® Multi-Rib T-Bar is a total load bearing lintel designed to support 230mm of brickwork over a clear opening.

### Sizes\*:

200/7mm (V) x 200/7mm (B)

200/9mm (V) x 200/9mm (B)

### Weight guide: [Nominal]

17kg/m

23kg/m

### Lengths:

900mm to 3300mm

3600mm to 6300mm

\* (V) is the vertical section dimension, (B) is the base section dimension.



### Features

- > Total load bearing lintel designed to support 230mm of brickwork over clear openings
- > Hot-dip galvanised in accordance with AS/NZS4680
- > 40% lighter than conventional steel lintels with a high strength to weight ratio
- > R3 Durability in accordance with AS/NZS2699.3
- > Compliant with relevant Australian Building Codes and Australian Standards
- > Fully engineered and university tested
- > Labelled and barcoded
- > 25 year performance warranty
- > Australian designed and manufactured

### Benefits

- > Peace of mind
- > Superior performance
- > Easy transportation, storage and handling
- > Long life and durability
- > Cost effective
- > Easy identification

### Installation

Place Galintel® Multi-Rib T-Bar in position on brick piers with minimum end bearing of 150mm. Prop before bricklaying no further than 1.2 metres apart with props remain in place until mortar has fully cured. Apply mortar (minimum 1:4) to all brick faces in contact with the T-Bar. The same number of courses must be laid internally and externally to prevent twisting of the T-Bar.

The Galintel® Multi-Rib T-Bar is a welded galvanised T-section comprising two multi-ribbed steel plates, 200mm wide with a nominal thickness of 7mm or 9mm (depending on the length).


The steel conforms to AS3678-250 with a yield strength of 280 MPa and a minimum ultimate tensile strength of 410 MPa. Welding is conducted to AS4100 and galvanising conforms to AS/NZS 4680.

### Composite Action

Galintel® products rely on composite action. To achieve ultimate performance, mortar must be present at all contact surfaces between bricks and lintel.

### Control Joints

Where control joints are used as a required structural element, loading of the lintel should be reduced by one third.

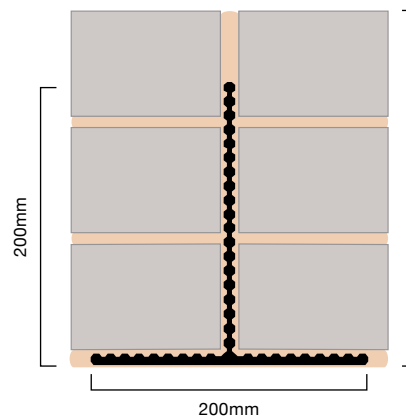



## TRADITIONAL T-BAR

**Galintel® Traditional T-Bar** is a fully machine welded structural lintel manufactured in Australia using 300MPa steel. Traditional steel sections are used in the support of brickwork over large clear openings and are not reliant on composite action.

### Sizes\*:

|                             |
|-----------------------------|
| 200/6mm (V) x 200/6mm (B)   |
| 200/8mm (V) x 200/6mm (B)   |
| 200/10mm (V) x 200/6mm (B)  |
| 200/10mm (V) x 200/10mm (B) |
| 250/10mm (V) x 200/10mm (B) |
| 250/12mm (V) x 200/10mm (B) |

### Weight guide: [Nominal]

|        |
|--------|
| 19kg/m |
| 23kg/m |
| 26kg/m |
| 32kg/m |
| 36kg/m |
| 40kg/m |

### Lengths:

|                  |
|------------------|
| 900mm to 2400mm  |
| 2400mm to 3900mm |
| 4200mm to 6300mm |
| 2700mm to 6300mm |
| 5200mm to 6300mm |
| 5200mm to 6300mm |



\* (V) is the vertical section dimension, (B) is the base section dimension.

### Features

- > Hot-dip galvanised to AS/NZS4680
- > Comply with Australian Standards and Building Code requirements
- > Product certified by Unisearch Limited
- > Fully machine welded
- > 300 MPa grade steel
- > Not reliant upon composite action
- > R3 Durability Rating in accordance with AS/NZS2699.3
- > Fully engineered and university tested
- > Compliant with relevant Australian Building Codes and Australian Standards
- > 25 year performance warranty
- > Labelled and barcoded

### Benefits

- > Superior performance
- > Easy transportation, storage and handling
- > Long life and durability
- > Cost effective
- > Easy identification

### Control Joints

Where control joints are used as a required structural element, loading of the lintel should be reduced by one third.

### Installation

Place Traditional T-Bar in position on brick piers, with minimum end bearing of 150mm. Prop before bricklaying. Props must be no further than 1.2 metres apart and must remain in place until mortar has fully cured. The same number of courses must be laid internally and externally to prevent twisting of the T-Bar.

## J-BAR SHELF BEAM

The Galintel® J-Bar Shelf Beam is the ideal solution for cavity walls, either double brick, or brick veneer with timber trusses. The J-Bar was developed in response to demand from builders for an economical substitute for built-up steel sections such as parallel flange channel and plate.

**Sizes\*:**

260/90mm (V) x 200/10mm (B)  
310/90mm (V) x 200/10mm (B)

**Weight guide: [Nominal]**

48kg/m  
55kg/m

**Lengths:**

4200mm to 6300mm  
4500mm to 6300mm



Registered design

\* (V) is the vertical section dimension, (B) is the base section dimension.

Similar to a T-bar but with a special top flange incorporated into the upright section, the Galintel® J-Bar provides an off-the shelf solution for cavity walls and is hot-dip galvanized, fully engineered and university tested.

The J-Bar is a convenient alternative to custom-made beams such as PFC and flat plate, which have to be fabricated and galvanized.

Galintel® J-Bar is the ideal solution for cavity walls, either double brick, or brick veneer with timber trusses.


Galintel® J-Bar is a registered design and was developed in response to demand from builders for an economical substitute for heavier fabricated built-up steel sections such as parallel flange channel and plate, providing up to 20% lighter weight than built-up steel.

As with all Galintel® quality products, the J-Bar Shelf Beam is provided with a full product warranty and safe load tables. Galintel® J-Bar is available in section depth of 260mm, is a convenient off the shelf substitution and is fully hot-dip galvanized for extended service life.

### The quick, economical solution for cavity walls

- > Header flange pre-drilled & galvanized for timber fixing
- > Bottom flange pre-drilled & galvanized for column connection
- > Innovative, efficient design
- > Up to 20% lighter than built-up steel sections
- > Hot-dip galvanized including ends (600g/m<sup>2</sup>)
- > Standard range of lengths
- > Engineered and university tested
- > 25 year performance warranty
- > Convenient 'off the shelf' solution
- > R3 durability rating


## TYPICAL J-BAR APPLICATIONS

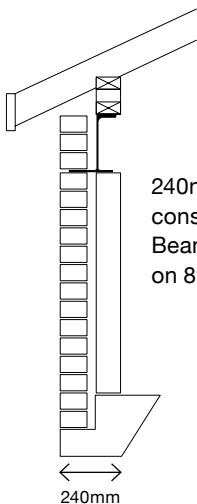

240mm brick veneer construction Shelf Beam sits generally on 89 x 89 SHS.



230mm solid brick wall (garage type).

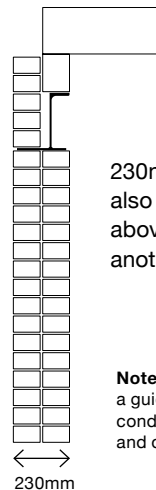

230mm solid brick (garage type) also allows for either jack stud wall above or stub column supporting another structural member.

**Note:** Examples shown are intended as a guide only. Please check actual site conditions and refer back to available plans and drawings.

# CAVI-T-BAR™

Galintel® Cavi-T-Bar™ is the ideal solution for cavity walls, either double brick, or brick veneer with timber trusses.

**Sizes\*:**

180/8mm (V) x 240/8mm (B)  
240/9.5mm (V) x 240/8mm (B)

**Weight guide:**

31kg/m  
41kg/m

**Lengths:**

2700mm to 4800mm  
2700mm to 6300mm



\* (V) is the vertical section dimension, (B) is the base section dimension.

The Cavi-T-Bar™ was developed in response to demand from builders for an economical substitute for built-up steel sections such as parallel flange channel and plate. For over 30 years the Australian construction industry has relied on Galintel® galvanised steel lintels as the brand which guarantees stronger, more durable and safer lintels.

Similar to a T-Bar but with a special top flange incorporated into the upright section, the Galintel® Cavi-T-Bar™ provides an off-the-shelf solution for cavity walls, hot-dip galvanised, fully engineered and University tested.

The Cavi-T-Bar™ is a convenient alternative to custom made lintels such as PFC and flat plate beams which have to be fabricated and galvanised.

As with all quality Galintel® products, the Cavi-T-Bar™ is provided with a full product warranty and safe load tables.

## Control Joints



Where control joints are used as a required structural element, loading of the lintel should be reduced by one third.

## Features

- > New versatile lintel
- > Convenient, economical substitute for built-up steel sections such as parallel flange channel and plate
- > Up to 20% lighter than built-up steel sections of equivalent load capacity
- > Hot-dip galvanised (600g/m<sup>2</sup>)
- > Available ex-stock
- > Available in standard lengths
- > Fully engineered and university tested
- > Top flange for added strength
- > Convenient "off the shelf" solution
- > 25 year performance warranty
- > R3 durability rated

## CAVI-T-BAR™ APPLICATIONS

**Brick veneer applications:**

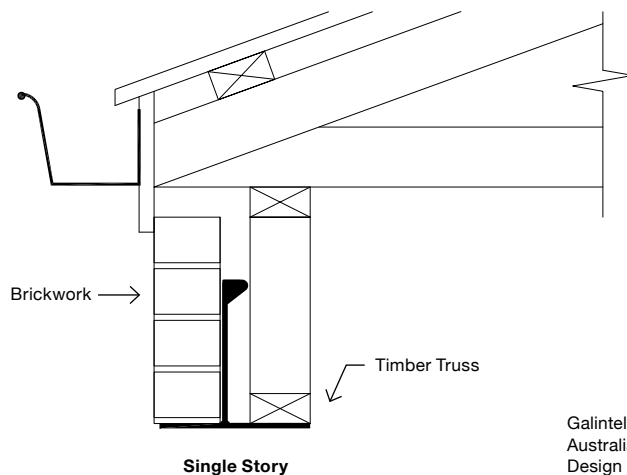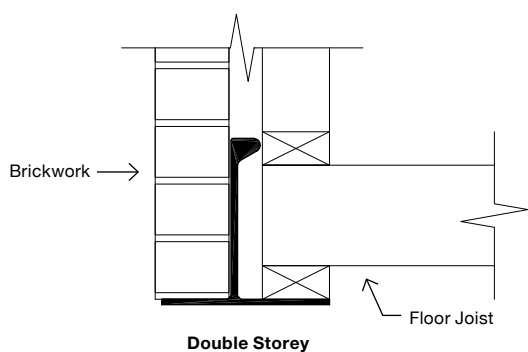

Galintel® Cavi-T-Bar™  
Australian Registered  
Design No. 306215.

## TRADITIONAL ANGLE

**Galintel® Traditional Angles** are hot rolled merchant bar lintels manufactured from 300Mpa grade steel. Traditional steel sections used in the support of brickwork over clear openings are not reliant on composite action.

### Sizes:

100 x 75 x 10mm  
 100 x 100 x 6mm  
 100 x 100 x 8mm  
 150 x 100 x 10mm  
 200 x 100 x 10mm

### Weight guide:

13kg/m  
 10kg/m  
 12kg/m  
 19kg/m  
 23kg/m

### Lengths:

900mm to 3000mm  
 900mm to 3000mm  
 900mm to 3000mm  
 1800mm to 6000mm  
 5200mm to 6000mm



### Features

- > Hot-dip galvanised in accordance with AS/NZS4680
- > R3 Durability Rating in accordance with AS/NZS2699.3
- > Compliant with relevant Australian Building Codes and Australian Standards
- > Not reliant on composite action
- > Hot rolled merchant bar lintel manufactured from 300MPa Grade Steel
- > 25 year performance warranty
- > Labelled and barcoded

### Benefits

- > Superior performance
- > Easy transportation, storage and handling
- > Long life
- > Cost effective
- > Easy identification

### Propping

For best results, all lintels must be propped before bricklaying. Props must be no further than 1.2m apart and must remain in place until the mortar has fully cured.

## TRADITIONAL FLAT BAR

**Galintel® Traditional Flat Bar** is a hot rolled lintel used to support brickwork over clear openings including windows & doors.

### Sizes:

85 x 7mm  
 75 x 10mm

### Weight guide:

5kg/m  
 6kg/m

### Lengths:

800mm to 1500mm  
 800mm to 1500mm



### Features

- > Hot-dip galvanised (600g/m<sup>2</sup>)
- > R3 Durability Rating to AS/NZS2699.3
- > Compliant with relevant Australian Building Codes and Australian Standards
- > Not reliant on composite action
- > Manufactured from 300MPa Grade Steel
- > Labelled and barcoded
- > 25 year performance warranty

### Control Joints

Where control joints are used as a required structural element, loading of the lintel should be reduced by one third.

### Propping

For best results, all lintels must be propped before bricklaying. Props must be no further than 1.2m apart and must remain in place until the mortar has fully cured.

### Benefits

- > Superior performance
- > Easy transportation, storage and handling
- > Long life
- > Cost effective
- > Easy identification

## FREQUENTLY ASKED QUESTIONS

### EVERYTHING YOU NEED TO KNOW ABOUT GALINTEL® PRODUCTS

#### How do I decide which Galintel® is best for my project?

Your design engineer should determine the type, size and length of Galintel® for the brickwork openings by consulting the relevant technical data and safe load tables.

#### Why are Galintel® products hot-dip galvanised?

Hot-dip galvanising products are the most economical form of corrosion protection for steel. Brickwork cracking caused by rust displacement is virtually eliminated by galvanising which also offers excellent impact and scratch resistance to cope with the rigours of transport and handling on a building site.

#### What if I require a nonstandard length Galintel®?

You may use a longer length of Galintel®, which will result in a longer end-bearing length. Where the endbearing length is restricted, you can cut the Galintel® to the required length. The cut end must be cleaned, primed and painted with two coats of zinc-rich paint (minimum 95% zinc content).

#### Do I need to prop Galintel® products?

Yes. During installation, props must be positioned and not removed until the mortar is cured. This allows the composite beam to form correctly and ensures level alignment of the brickwork. Props should be no further apart than 1.2m.

#### How many courses of bricks are needed above a steel lintel?

The Building Code of Australia requires that not less than three courses of brick must be used above a steel lintel to form an arching effect.

#### Can I weld to a Galintel®?

We do not recommend welding of Galintel® products as welding destroys the protective zinc coating. If welding is required, consult your design engineer.

#### Which Galintel® product is best suited for a rendered finish?

Galintel Rendabar® is ideal, because it is specifically designed for rendered applications.

#### Is there a Galintel® available for fire-rated structures?

Yes. Galintel Rendabar® has a fire rating of up to two hours, depending on the application. To achieve the designed fire rating, Galintel Rendabar® must be cement-rendered after installation. The rendering must also meet relevant building codes and standards. For design information, refer to the Rendabar® Fire Rated Safe Load Table.

#### Are Galintel® products suitable for buildings near the coast or in severe environments?

Galintel® products are suitable for use in these areas, but additional coatings may be required. AS2312 specifies the types of additional protective coating needed to maintain the required service life in highly corrosive environments.

#### What guarantees does Galintel® offer?

NEPEAN Building & Infrastructure guarantees that all Galintel® products are free from defects in material and workmanship.

Galintel® products have been appraised by the CSIRO, and comply with the requirements of the BCA and are designed and tested to meet the relevant sections of AS3700:2001 – Masonry structures.

Galintel® products meet the requirements of the R3 durability classification, as defined in AS/NZS2699.3:2002.

Galintel® products have been recognised by the Australian Design Council with an Australian Design Award.

#### How do I identify a genuine Galintel® product?




Galintel® products can be identified by their ribbed profile. All products in the Galintel® range are also clearly labelled to show the name, size, length, unit weight, date of manufacture and durability classification.



#### How do I ensure full composite action is achieved?

By ensuring that mortar is present at all contact surfaces between bricks and lintel and that the lintel is correctly propped during installation.

## STOCK LENGTH GUIDE

- > Always refer to engineer's specification for correct lintel section, size & installation
- > Check availability of stock lengths before ordering

| Flat Bar  | 85x7        | 75x10       | Angle   | 100x100x6  | 150x100x6  | 100x75x10   | 150x100x10  | 200x100x10  | 100x100x6                   | 100x100x8                   |
|---|-------------|-------------|---|------------|------------|-------------|-------------|-------------|-----------------------------|-----------------------------|
|   | Traditional | Traditional |   | Solid Base | Solid Base | Traditional | Traditional | Traditional | Traditional (Victoria Only) | Traditional (Victoria Only) |
|  | 800         | 800         |  | 900        | 1800       | 900         | 1800        | 5200        | 900                         | 900                         |
|   | 900         | 900         |   | 1200       | 2100       | 1200        | 2100        | 5400        | 1200                        | 1200                        |
|   | 1000        | 1000        |   | 1500       | 2400       | 1500        | 2400        | 6000        | 1500                        | 1500                        |
|   | 1100        | 1100        |  | 1800       | 2700       | 1800        | 2700        |             | 1800                        | 1800                        |
|   | 1200        | 1200        |   | 2100       | 3000       | 2100        | 3000        |             | 2100                        | 2100                        |
|   | 1500        | 1300        |   | 2400       | 3300       | 2400        | 3300        |             | 2400                        | 2400                        |
|   |             | 1400        |   | 2700       | 3600       | 2700        | 3600        |             | 2700                        | 2700                        |
|   |             | 1500        |   |            | 4000       | 3000        | 4000        |             | 3000                        | 3000                        |
|   |             |             |   |            |            |             | 4200        |             |                             |                             |
|   |             |             |   |            |            |             | 4500        |             |                             |                             |
|   |             |             |   |            |            |             | 5000        |             |                             |                             |
|   |             |             |   |            |            |             | 5200        |             |                             |                             |
|   |             |             |   |            |            |             | 5500        |             |                             |                             |
|   |             |             |   |            |            |             | 6000        |             |                             |                             |

| T-Bar   | 200/7x200/7 | 200/9x200/9 | 200/6x200/6 | 200/8x200/6 | 200/10x200/6                 | 200/10x200/10 | 250/10x200/10 | 250/12x200/10 |
|---|-------------|-------------|-------------|-------------|------------------------------|---------------|---------------|---------------|
|   | Multi Rib   | Multi Rib   | Traditional | Traditional | Traditional (NSW & Qld only) | Traditional   | Traditional   | Traditional   |
|  | 900         | 3600        | 900         | 2400        | 4200                         | 2700          | 5200          | 5200          |
|   | 1200        | 3900        | 1200        | 2700        | 4500                         | 3000          | 5400          | 5400          |
|   | 1500        | 4200        | 1500        | 3000        | 4800                         | 3300          | 5700          | 5700          |
|  | 1800        | 4500        | 1800        | 3300        | 5100                         | 3600          | 6000          | 6000          |
|   | 2100        | 4800        | 2100        | 3600        | 5400                         | 3900          | 6300          | 6300          |
|   | 2400        | 5100        | 2400        | 3900        | 5700                         | 4200          |               |               |
|   | 2700        | 5400        |             |             | 6000                         | 4500          |               |               |
|   | 3000        | 5700        |             |             | 6300                         | 4800          |               |               |
|   | 3300        | 6000        |             |             |                              | 5200          |               |               |
|   |             | 6300        |             |             |                              | 5400          |               |               |
|   |             |             |             |             |                              | 5700          |               |               |
|   |             |             |             |             |                              | 6000          |               |               |
|   |             |             |             |             |                              | 6300          |               |               |

### Notes

- > All lengths in the above tables are in millimetres
- > Traditional Angle sizes 100x100x6mm & 100x100x8mm stocked in Victoria only
- > Traditional T-Bar size 200/10x200/6 stocked in NSW and Qld only
- > Above information to be used as a guide only & may change without notice



## NEPEAN Building and Infrastructure

Australia's largest, fully integrated manufacturer and supplier of galvanised metal products for industrial, commercial and residential buildings.

### Galintel®

Galvanised steel lintels, retaining wall posts and specialist building products

### Weldlok®

Grating, handrail and drainage products

### Mastermesh®

Expanded and perforated metal

### Galserv®

Hot-dip galvanising

---

## CONTACT DETAILS

### Galintel® National Orders and Customer Service

**P:** 1800 LINTEL (1800 546 835)

**F:** + 61 2 6691 2121

**E:** [galintel@nepean.com](mailto:galintel@nepean.com)

### NEPEAN Building & Infrastructure National Sales Branches

#### New South Wales

137 Rookwood Road  
PO Box 57  
Yagoona NSW 2199

#### Victoria

171 Derrimut Drive  
Derrimut VIC 3030

#### Queensland

967 Nudgee Road  
PO Box 283  
Banyo QLD 4014

#### Western Australia

1/103 Campbell Street  
Belmont WA 6104

#### Galintel® Manufacturing Facility

45-47 Wingara Drive  
PO Box 396  
Coffs Harbour NSW 2450

#### Head Office

137 Rookwood Road  
PO Box 57  
Yagoona NSW 2199

---

Information contained in this brochure is supplied in good faith and with the view to assist the user in the correct selection of our products. Customers are responsible for ensuring that products usage is appropriate, fit for purpose, safe and compliant with relevant Australian Standards and Building Codes. While every care is taken to ensure that the information contained in this brochure is correct, no warranty is made nor is any condition expressed or implied. The information contained herein does not constitute an offer nor do we guarantee its accuracy or completeness and assume no responsibility for errors or omissions or for any consequences of reliance on this publication. NEPEAN Building and Infrastructure is committed to continual product improvement and therefore reserves the right to change details and designs without notice.

© NEPEAN, June 2019



[www.galintel.com.au](http://www.galintel.com.au)